

WOBBLE WEDGES®


TECHNICAL SPECIFICATIONS

Wobble Wedges® are a modular system of precision engineered, securely stackable, non-slip, tapered plastic shims. They are available in 4 interlocking and cross nesting sizes in both soft and hard resins. Wobble Wedges can be used independently or can be stacked in any combination or orientation to accomplish practically any shimming need.

They are typically used by industrial manufacturers, restaurants and food service supply, plumbing contractors, woodworkers, cabinet and closet installers, electricians, hobbyist and do-it-yourself home makers to stabilize, support, level or protect workpieces, restaurant tables, furniture, cabinets, shelving, appliances, HVAC equipment, and other similar items. **Hard Wobble Wedges** provide firm support for heavy objects. **Soft Wobble Wedges** absorb vibration and silence rattles.

The Wobble Wedges® modular system is patented and has no equal. Each Wobble Wedge® in the system is comprised of multiple rows and off-set columns of ridges that provide precise, repeatable adjustments, secure-stackibility™ and both lateral and horizontal stability.

Patented Interlocking Ridges

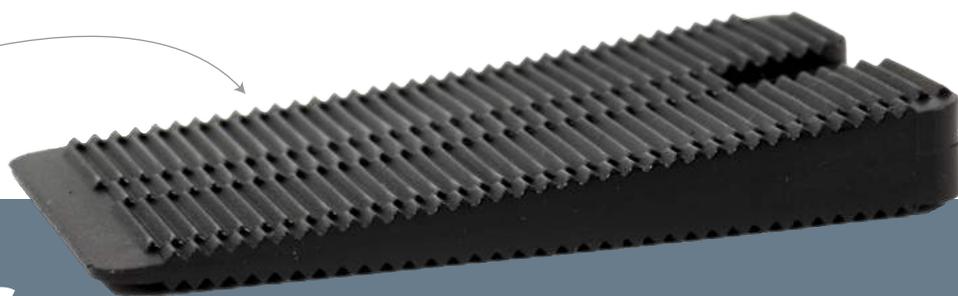

4 INTERLOCKING WEDGE SIZES



Mini-Wedge

Dimension:
1.12" x .58" x .16"

Angle: 6.87°

Tapers from: .03" to .16"

Off-set ridge columns: 3

Deep ridge rows: 20



Standard Size


Dimension:
1.92" x 1.11" x .25"

Angle: 6.45°

Tapers from: .03" to .25"

Off-set ridge columns: 5

Deep ridge rows: 38

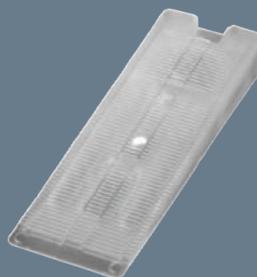

BigGap™ Wedge


Dimension:
3.52" x 1.13" x .48"

Angle: 7.13°

Tapers from: .040" to .48"

Off-set ridge columns: 5

Deep ridge rows: 68

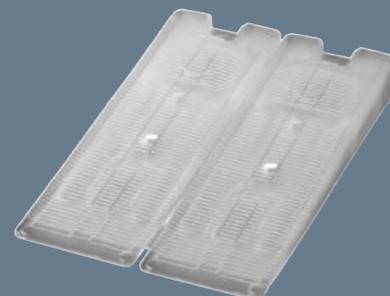

BigGap2™ Wedge

Dimension:
3.52" x 2.39" x .48"

Angle: 7.13°

Tapers from: .040" to .48"

Off-set ridge columns: 10

Deep ridge rows: 68

★ **MADE IN THE USA** ★

*Images not shown at actual or relative size
**The BigGap2 Wobble Wedges can easily be separated into two individual BigGap shims.



SOFT WOBBLE WEDGES

Tensile Strength (PSI)	497 PSI
Softness/Hardness	77 Shore A
Flexibility/Elongation	204%
Melt Point:	80°C (176°F)
Low Temperature Brittleness:	-35°C (-31°F)

PROPERTIES:

Soft, flexible rubber-like texture. Easy to trim. Absorbs vibration. Resists glue and paint. Will not shrink or swell with changes in moisture.

COLORS:

Clear, Black, White

HARD WOBBLE WEDGES


Tensile Strength (PSI)	4800
Compressive Strength (PSI)	7000
Hardness (Rockwell R)	92
Water Absorption, 24 hrs (%)	<0.01
Melt Point	230°C (446°F)

PROPERTIES:

Will not swell or shrink with changes in moisture. Supports over 2000 lbs.

COLORS:

Clear/Natural Translucence, Black

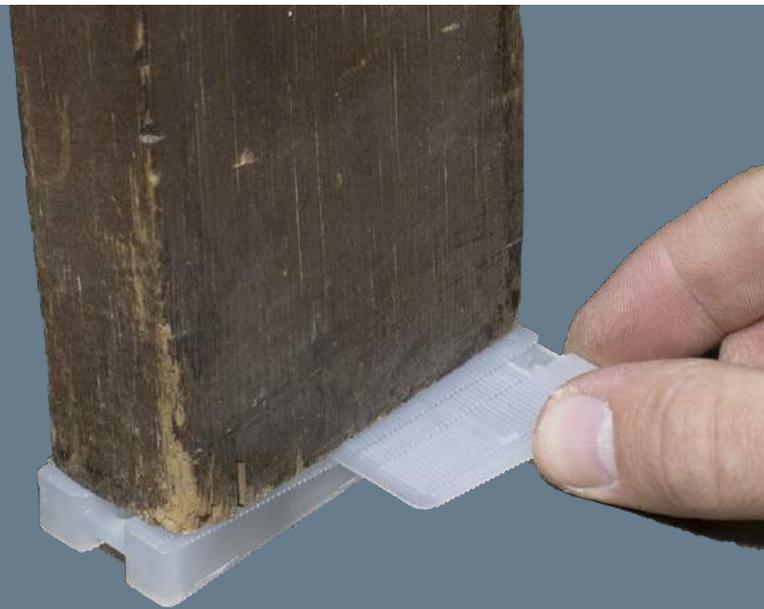

LEARN MORE & ORDER ONLINE

WOBBLEWEDGES.COM

OR CONTACT:

Focus 12 Inc. Boulder, CO
800-635-4494
info@wobblewedges.com

PATENT #7,784,751 & #8,297,567