

For the smallest fixes.  
Oh so discrete!

### MINI-WEDGE

Dimension: 1.12" x .58" x .16"

Angle: 6.87°

Tapers from: .03" to .16"

Off-set ridge columns: 3

Deep ridge rows: 20



Standard by which all other  
shims are measured.

### STANDARD WEDGE


Dimension: 1.92" x 1.11" x .25"

Angle: 6.45°

Tapers from: .03" to .25"

Off-set ridge columns: 5

Deep ridge rows: 38

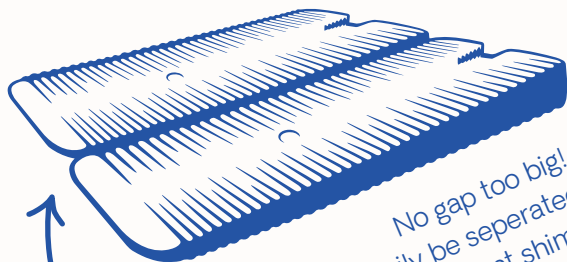

No gap too big!  
BigGap can easily be separated  
into two independent shims!

### BIGGAP™ WEDGE

Dimension: 3.52" x 2.39" x .48"

Angle: 7.13°

Tapers from: .040" to .48"

Off-set ridge columns: 10

Deep ridge rows: 68

Wobble Wedges® are a modular system of precision engineered, securely stackable, non-slip, tapered plastic shims. They are available in 3 interlocking and cross nesting sizes in both **flexible** and **rigid** resins. Wobble Wedges can be used independently or can be stacked in any combination or orientation to accomplish practically any shimming need.

They are typically used by industrial manufacturers, restaurants and food service supply, plumbing contractors, woodworkers, cabinet and closet installers, electricians, hobbyist and do-it-yourself home makers to stabilize, support, level or protect workpieces, restaurant tables, furniture, cabinets, shelving, appliances, HVAC equipment, and other similar items. Rigid Wobble Wedges provide firm support for heavy objects. Flexible Wobble Wedges absorb vibration and silence rattles.

### A SECURE *stackable* SYSTEM

The Wobble Wedges® modular system is patented and has no equal. Each Wobble Wedge® in the system is comprised of multiple rows and off-set columns of ridges that provide precise, repeatable adjustments, secure-stacklibty™ and both lateral and horizontal stability.





**FLEXIBLE WEDGES:**

Tensile Strength: 497 PSI

Softness/Hardness: 77 Shore A

Flexibility/Elongation: 204%

Melt Point: 80°C (176°F)

**PROPERTIES:**

Soft, flexible rubber-like texture. Easy to trim. Absorbs vibration. Resists glue and paint. Will not shrink or swell with changes in moisture.

**COLORS:**

Clear, Black, White

*Flexes*  
**TO YOUR FIX**



**RIGID WEDGES:**

Tensile Strength: 4800 PSI

Compressive Strength: 7000 PSI

Hardness (Rockwell R): 92

Water Absorption, 24 hrs (%): <0.01

Melt Point: 230°C (446°F)

**PROPERTIES:**

Will not swell or shrink with changes in moisture.

Supports over 2000 lbs.

**COLORS:**

Clear/Natural Translucence, Black

**WEDGE IT &**  
*forget it!*

## FLEXIBLE WEDGES



### 6 COUNT

- ▲w 3.75" x .75" x 6.25"
- ▲w 6 Count
- ▲w 24/Case
- ▲w 192/Master
- ▲w Clear (5624)



### 30 COUNT

- ▲w 3" x 3" x 3.25"
- ▲w 30 Count
- ▲w 24/Case
- ▲w 96/Master
- ▲w Black (4030) Clear (5030) White (7030)



### 75 COUNT

- ▲w 3" x 3" x 6.5"
- ▲w 75 Count
- ▲w 12/Case
- ▲w 48/Master
- ▲w Black (4075) Clear (5075) White (7075)



### 300 COUNT

- ▲w 5.5" x 5.5" x 8.75"
- ▲w 300 Count
- ▲w 4, 6, 12 Masters
- ▲w Black (4300) Clear (5300) White (7300)



Clear



Black



White



### 6 COUNT

- ▲w 3.75" x .75" x 6.25"
- ▲w 6 Count
- ▲w 24/Case
- ▲w 192/Master
- ▲w Translucent (624)



### 30 COUNT

- ▲w 3" x 3" x 3.25"
- ▲w 30 Count
- ▲w 24/Case
- ▲w 96/Master
- ▲w Translucent (030) Black (2030)



### 75 COUNT

- ▲w 3" x 3" x 6.5"
- ▲w 75 Count
- ▲w 12/Case
- ▲w 48/Master
- ▲w Translucent (075) Black (2075)



### 300 COUNT

- ▲w 5.5" x 5.5" x 8.75"
- ▲w 300 Count
- ▲w 4, 6, 12 Masters
- ▲w Translucent (300) Black (2300)



Translucent



Black